


Allow 55" of clearance above top deck level

### Voyager II Cargo Lift Dimensions

<b>A</b>	HAND RAIL HEIGHT	46"
<b>B</b>	OUTSIDE SIDE-TO-SIDE	54.25"
<b>C</b>	BACK OF BEAMS TO CAGE FRONT (OUTSIDE)	60.75"
<b>D</b>	BACK OF CAGE TO FRONT OF CAGE (OUTSIDE)	54.25"
<b>E</b>	BACK TO FRONT (INSIDE)	48.25"
<b>F</b>	BEAM WIDTH (OUTSIDE) (CENTER TO CENTER)	32" 29"
<b>G</b>	BACK OF POWER HEAD TO CAGE FRONT (OUTSIDE)	64.75"
<b>H</b>	FLOOR THICKNESS	4"

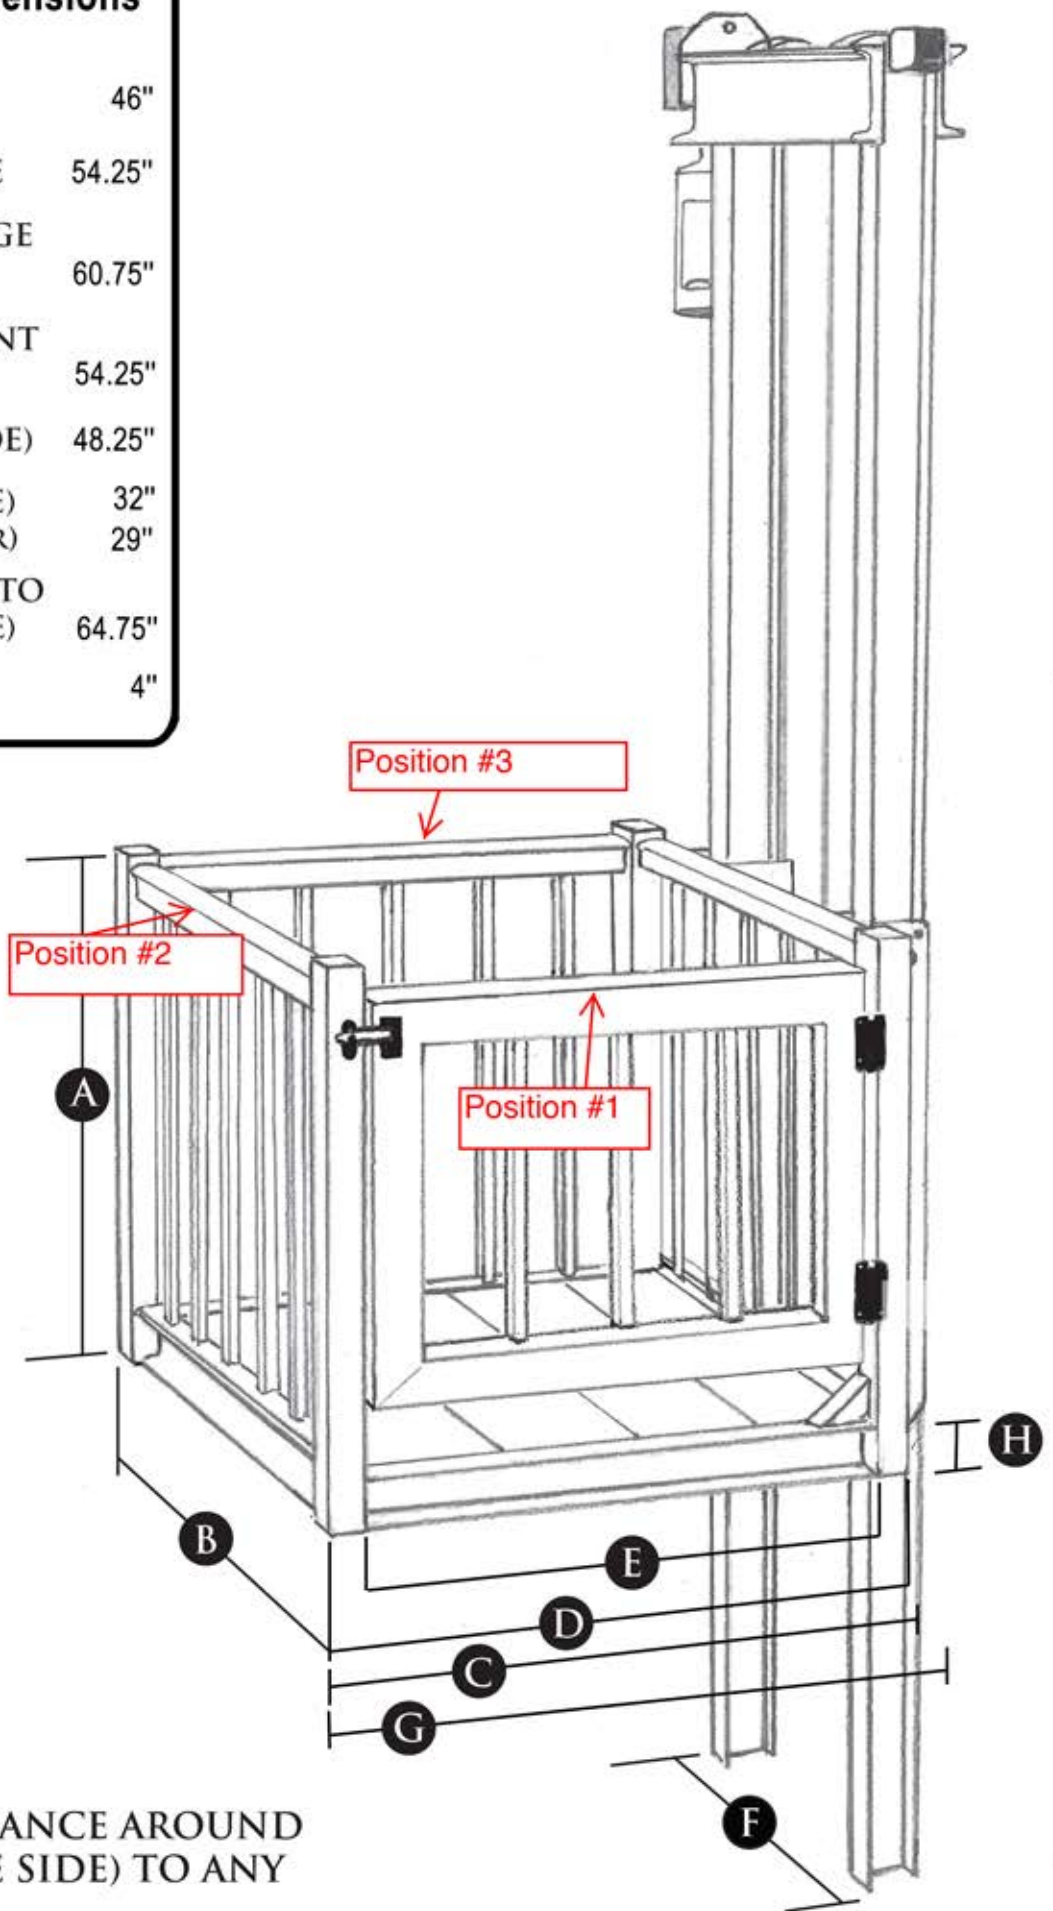

Gate opening locations are determined by the BEAM SIDE.

Looking into the basket from behind the beams:

- #1 - is on the left of the beams
- #2 - is across from the beams
- #3 - is on the right of the beams.

*This diagram shows a #1 gate opening location.*

- ALLOW 1.5" CLEARANCE AROUND CAGE (2" ON GATE SIDE) TO ANY STRUCTURE